

N600

SPRING REWIND DUAL HOSE REELS



Optional
TR roller
position
shown

To handle dual 1/4" through 1/2" I.D. hose.

- Narrow frame and compact mounting base.
- Non sparking ratchet assembly.
- Declutching arbor to prevent damage from reverse winding.
- Standard inlets 90° balanced pressure swivel joints 1/2" female NPT threads.
- Standard outlets 1/2" female NPT threads.
- Pressures to 3000 psi (207 bar)
- Temperatures from -60° F to +250° F (-51°C to +121°C).
- Consult factory for other pressures & temps.
- 4-way roller assembly.
- Constant Tension is available – consult factory.
- Reels for use with oxygen/ acetylene.

See Series N400 Hannay Reels Welding Catalog H-0408-W.

For:

- Hydraulics
- Air/ Water

- Spray Painting

Parts Drawing – ISO 80

Model Number	Hose Capacity of Reel feet m.				Approx. Weight lb. kg.			Standard Roller Assy	Reel Dimensions*** inches mm.							
	I.D. (in) I.D. (mm)	1/ 4" 6	3/ 8" 10	1/ 2" 13	NET	UPS/ FedEx	Freight		A	B	C	E	F	G	H	X
	O.D. (in) O.D. (mm)	5/ 8" 16	3/ 4" 19	7/ 8" 22		SHIP Wt.	SHIP Wt.									
N615-19-20-10.5C		2/ 35 2/ 11	2/ 35 2/ 11	2/ 20 2/ 6	63 29	74* 34	98 44	N203	9 229	3 76	10.5 267	20.75 527	11.75 298	20 508	10.62 270	7 178
N617-19-20-10.5J		2/ 50 2/ 15	2/ 50 2/ 15	2/ 25 2/ 8	66 30	84* 38	101 46	N205	11 279	5 127	10.5 267	20.75 527	13.75 349	20 508	10.62 270	9 229
N615-23-24-10.5B		2/ 65 2/ 20	2/ 60 2/ 18	2/ 30 2/ 9	87 40	104* 47	122 55	N203	9 229	3 76	10.5 267	23.75 603	11.75 298	24 610	12.62 321	7 178
N617-25-26-15.5B		2/ 75 2/ 23	2/ 75 2/ 23	2/ 50 2/ 15	93 42	— —	128 58	N205	11 279	5 127	15.5 394	25.25 641	13.75 349	26 660	13.62 346	9 229
N617-25-26-15.5A		2/ 100 2/ 31	2/ 85 2/ 26	— —	120 54	— —	155 70	N205	11 279	5 127	15.5 394	25.25 641	14.5 368	26 660	13.62 346	9 229


Notes: A hose stop is necessary on hose to keep spring from unwinding.

1. Specifications subject to change.
2. Reel models and capacities are for standard drag applications; for vertical lift applications consult factory.
3. Other sizes, from standard components, available on request.
4. **Finish:** refer to Page 4.
5. **Be sure to check dimensions and weights prior to ordering.**


NOTICE: A Flexible Connector must be used between the inlet pipe and the inlet swivel joint.

* Dimensional weight may apply when shipped as a parcel package (via FedEx or UPS Ground).

*** x, y indicate mounting holes. See page 2



Available Roller Positions

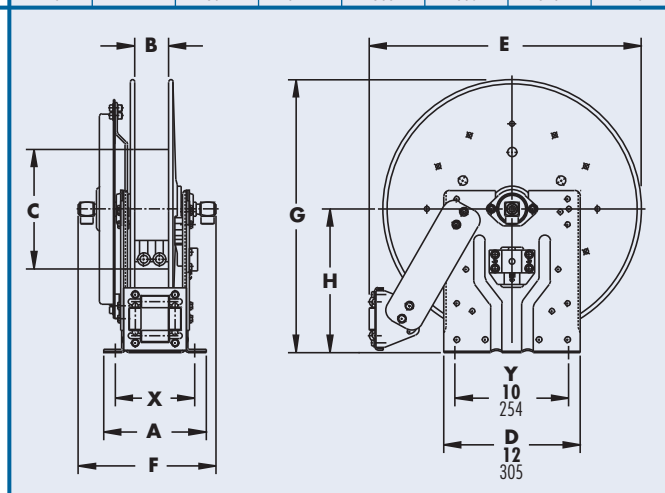

For hydraulic tool circuit applications full flow swivels w/ viton seals are recommended (add 2.25 to "F" dim in chart)