

PORTABLE HYDRAULIC POWER UNIT

MODELS HT20G and HT20GV



This power unit features a 22 HP Honda OHV gas engine, extended run fuel tank, extra oil cooling and easy handling. It is available with a fixed displacement gear pump or pressure compensated piston pump. Great for continuous duty applications powering our pumps or other hydraulic tools and equipment. Variable speed throttle controls hydraulic output.

FEATURES


- Reliable Honda Electric Start Gas Engine with Oil-Alert™ Safety Shutdown
- Roll Cage Frame with Single Point Lifting Eye
- Gear-Type Hydraulic Pump (HT20G)
- High Efficiency Pressure Comp. Piston Pump (HT20GV)
- Variable Speed Throttle Controls Hydraulic output
- Hydraulic Oil Cooler with Thermostatic Fan Control
- Quick - Disconnect Hose Couplings
- System Relief Valve
- Made in USA
- Tank Top Filler/ Strainer
- Liquid Filled Pressure Gauge
- Spin-On Return Filter W/ Indicator
- Fluid Level and Temperature Gauges

OPTIONS

- Other Flow and Pressure Combinations

A0116

Model HT20G/GV Overall Dimensions

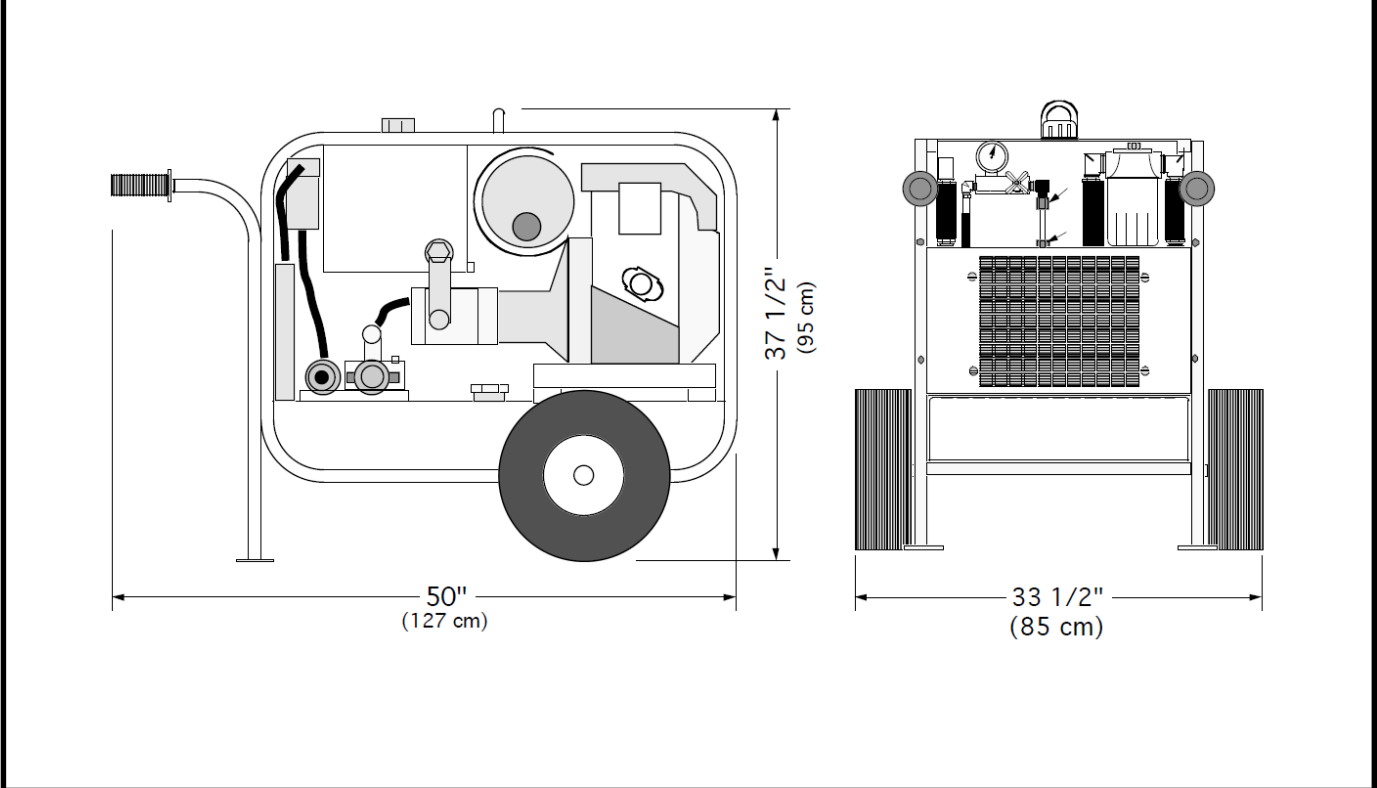

SPECIFICATIONS

ENGINE:..... Honda GX690 Gasoline (Petrol)
HORSEPOWER:..... 22 @ 3500 RPM
HYDRAULIC OUTPUT:..... Variable, Max. 12 GPM (45 LPM)
OPERATING PRESSURE:..... Maximum 2500 PSI (170 Bar)
HOSE PORT SIZE:..... 3/4" NPT
HYDRAULIC OIL:..... SAE 10W or 20W Type AW
also: Dexron ATF or Biodegradable Oil (Consult Factory)
OIL FILTRATION:..... 10 Micron (Standard)
OIL RESERVOIR CAPACITY:..... 8 Gallons (30 Liters)
FUEL TANK CAPACITY:..... 15 Gallons (57 Liters)
FUEL CONSUMPTION:..... Approx. 1.5 Gal/Hr (5.7 Liters/Hr)
DIMENSIONS:...H 37 1/2" (95 cm) x W 33 1/2" (85 cm) x L 50" (127 cm)
WEIGHT (Dry):..... (HT20G) 450 lbs. (204 kg)
 (HT20GV) 470 lbs. (213 kg)

* For Flows and Pressures Other Than Standard, Consult Factory

Since we are constantly working to improve our products, specifications are subject to change without notice.