

2" HYDRAULIC SUBMERSIBLE UTILITY PUMP

MODELS

S2TC-2 (Ductile Iron Body)

S2TCAL-2 (Aluminum Body)

2" (5 cm) Discharge

The S2TC-2 is a very portable and versatile all purpose utility pump. The two channel impeller can handle solids and is designed for jobs such as construction sites and manhole pumping.



*Ductile Iron shown with trash strainer, aluminum with water strainer

FEATURES

- Efficient Two Channel Impeller will pass 1" (2.5 cm) semi-solids
- Standard gear motor with optional gerotor motor
- Variable Speed hydraulic drive
- Small, lightweight and versatile
- Can be bolted directly to a tank or truck
- Standard trash strainer or optional water strainer
- Safe Hydraulic Drive can be used where electric power is hazardous or impractical
- Operates with our HT6 through HT13 power units or other hydraulic power sources capable of flows to 5 GPM
- Stainless Steel model available

CE


SPECIFICATIONS

WEIGHT:	S2TC-2.....	25 lbs. (11 kg)
	S2TCAL-2.....	17 lbs. (7.7 kg)
HEIGHT:		13" (33 cm)
WIDTH (@ widest point):		9 3/8" (24 cm)
DISCHARGE:		2" NPT(F)
INLET FLANGE:		1 1/2" 125#
SOLIDS HANDLING:		1" (2.5 cm)
HOSE PORTS:	(Pressure)	7/8-14 (-10) SAE
PUMP BODY:	S2TC-2.....	Ductile Iron
	S2TCAL-2.....	Aluminum
IMPELLER:		Ductile Iron/ SS option
SHAFT:		Heat Treated Steel Alloy
SHAFT SEAL:		Carbon/Ceramic (Std); Silicon Carbide(opt)
ELASTOMERS:		Buna N (Std)/ Viton option
HYDRAULIC OIL:		214-320 s.s.u. @ 100°F (64°C)
INPUT FLOW:		Max. 5 GPM (19 LPM)
OPERATING	Gerotor motor	Max: 2000 PSI (136 Bar)
PRESSURE:	Standard Motor	Max: 2500 PSI (172 Bar)
POWER SOURCE:		Any Open Center Hydraulic System


D0516

Specifications are subject to change without notice

Model S2TC-2 Overall Dimensions

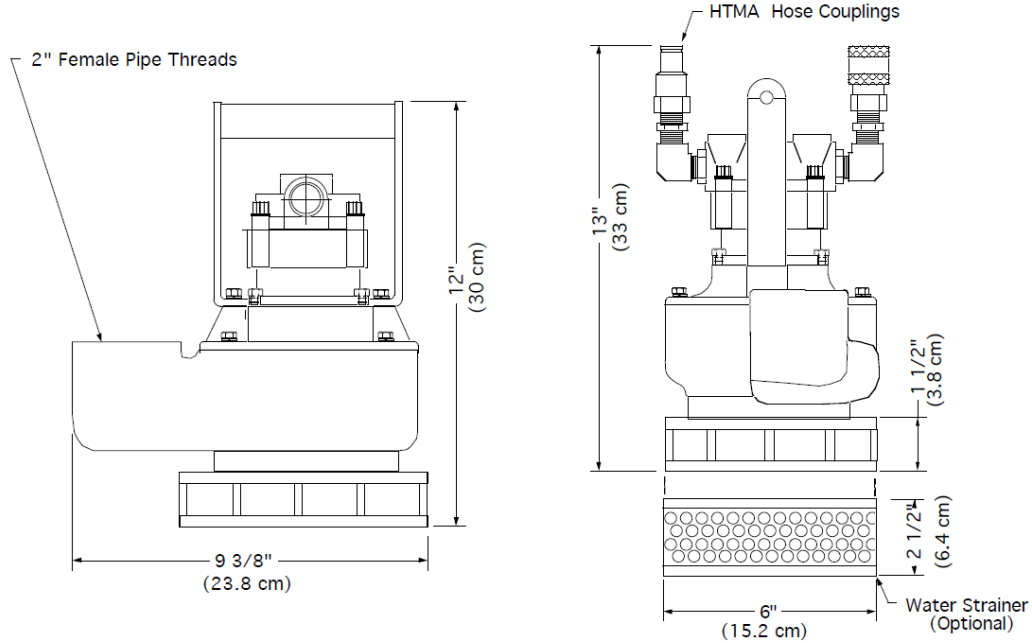

S2TC-2 Typical Performance

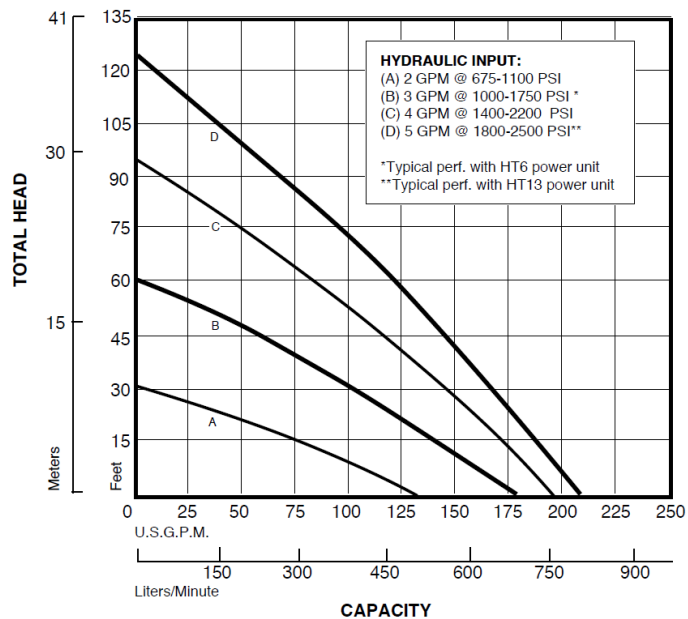

Curves are based on pumping water at 60°F. For performance curves other than shown above, consult factory.