

RV-MAX^{360S} MCTM

Extendable Pole

- Telescoping reach up to 29.5 ft extensions available
- Fiberglass construction
- Electrically & thermally insulated
- Anti-rotation oval shape



Light Module

- 6,600 Lumens · 6 light modes
- Extra spotlight for side pipe inspection
- Full workday battery



3D Models/ Point Clouds

- Subcentimeter accuracy
- Textured 3D point clouds
- Exports to PLY format



Tripod

- 100 ft / 30 m strap with distance markings
- Telescopic legs
- Corrosion-free, lightweight aluminum construction



360° Camera

- 360° HD video
- Real Time Depth Finder
- IP68 rated
tested 6 ft underwater for 1 hour
- Integrated rubber bumpers for impact protection
- Remote live view & management with RinnoCloud
- Ruggedized Windows tablet with RinnoView software

GENERAL SPECIFICATIONS

A VISION WITHOUT LIMITS

WORKING TEMP

-4°F to +113°F

CHARGING TEMP

+32°F to +104°F

STORAGE TEMP

-4°F to +122°F

WATERPROOF

Down to 6.4 ft

MAX DIAMETER

5.5 in.

CONNECTIVITY

Wi-Fi · Cellular · GPS

POWERFUL VIDEO STREAMING, DATA TRANSFER AND 3D MODELING PLATFORM

CONNECTIVITY

Wi-Fi • Cellular

Auto-sync when in range

GEOLOCATION


GPS

Live fleet map

STANDARDS


NASSCO • MACP L2

Measurement-ready exports

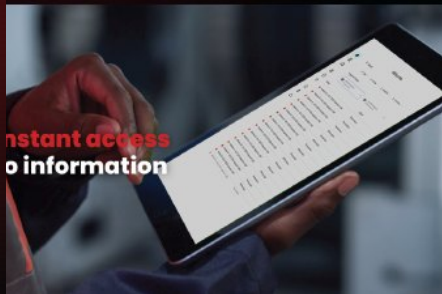

Automatic File Transfer

- Videos upload to RinnoCloud the moment the RV-MAX 360S detects a known Wi-Fi network
- Push 360° footage and 3D point clouds to any NASSCO or non-NASSCO storage
- Operators spend zero minutes shuttling files

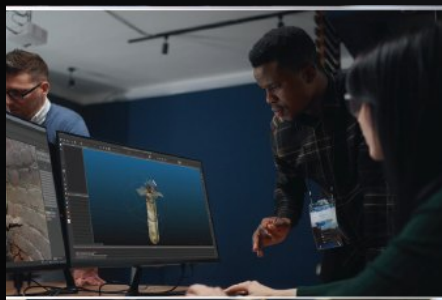

3D Models & Measurements

- Convert any 360° survey into actionable 3D point clouds — no extra hardware
- Capture every measurement needed for Level 2 MACP surveys
- Measure side-pipe and mainline diameters from the model



Livestream From Anywhere

- 360° live video from any RV-MAX 360S in your fleet, from any remote location
- Supervisors and operators stay in sync without leaving the office
- Faster, better decisions on every job



Manage & Geomap Your Fleet

- Track every RV-MAX 360S on a live map via internal GPS and cellular SIM
- Push configuration updates remotely — no truck rolls
- Get actionable utilization and performance metrics

TECHNICAL SPECIFICATIONS

COMPLETE REFERENCE · RV-MAX 360S

01 IMAGING

FIELD OF VIEW	360°
RESOLUTION	4K · 8.1 MP
FORMAT	MP4
FRAME RATE	5 to 30 fps
DEPTH FINDER	Integrated <i>1/4" precision</i>
AUDIO	Dual microphones

03 LIGHTING

OUTPUT	6,600 Lumens
MODES	6 light modes + side spotlight
LED LIFE	50,000 hours
TEMPERATURE	Optimized for video inspection

05 POWER & BATTERY

OPERATING TIME	Up to 6 hours <i>depending on lighting mode</i>
CHARGING TIME	4 hours
POWER SUPPLY	12.6 VDC · 4 A · 51 W

07 ENVIRONMENTAL

WORKING TEMP	-4°F to +113°F
CHARGING TEMP	+32°F to +104°F
STORAGE TEMP	-4°F to +122°F
INGRESS	IP68 <i>tested 6 ft underwater for 1 hour</i>
MAX DIAMETER	5.5 in.

09 BOX CONTENT

INCLUDES	RV-MAX 360S Camera unit Ruggedized Windows tablet External power supply (12.6 VDC · 4 A · 51 W) 300W 12V AC/DC inverter Protective hard case
----------	---

02 CONNECTIVITY

WI-FI	2.4 / 5 GHz · 802.11 a/b/g/n/ac
MOBILE	3G / 4G LTE
POSITIONING	GPS

04 STORAGE

INTERNAL	256 GB
----------	--------

06 3D MODELS/POINT CLOUDS

PRECISION	Subcentimeter
3D MODELS	Textured point clouds <i>1/4" model precision</i>
EXPORT	PLY format

08 PHYSICAL

UNIT WEIGHT	7.0 lbs
POLE WEIGHT	4.9 lbs
TRIPOD WEIGHT	10.5 lbs
POLE LENGTH	6 ft – 29.5 ft <i>extensions available</i>
TRIPOD STRAP	100 ft / 30 m <i>with distance markings</i>

10 COMPLIANCE & WARRANTY

HAZARDOUS MATERIALS	RoHS 2 Compliant
SAFETY & EMC	UL · CSA · FCC · CE
WARRANTY	1 year