



VIVAX
METROTECH



vLoc3-9800


UTILITY LOCATOR

- Distance-sensitive Left / Right Guidance™
- Fully-automatic gain control
- Directional compass indicator
- Internal data logging
- Cloud-based data warehousing
- Optional Bluetooth connectivity


The **vLoc3-9800**'s patented Distance Sensitive Left/Right Guidance and audible tone guide you to the path of the buried utility. The current measurement and compass direction indicator features confirm that you are on target.

The user-configurable vLoc3-9800 contains two passive locate modes, fault-find mode, and a range of configurable frequencies from 98Hz to 131kHz. Visual and mechanical vibration alerts can be configured by the user providing warnings for shallow depth, overload, overhead cables, and excessive swinging. Plug-in-play options for the receiver include an optional Bluetooth module usable with external GPS devices and the plug-in vLoc3-MLA (marker locator adapter) to locate buried markers.


Use the free VM-MAP smartphone application to create real-time maps with GPS data and data from the locator such as time, date, depth of cover and current on the line, and add custom comments to each entry. Data captured by external GPS devices via Bluetooth can be downloaded for further analysis and used with GIS systems or google maps.




Left/Right Locate Screen - Shows left/right indication, Signal strength with continuous depth and current from the line.



Peak Locate Screen - shows a peak curtain style bar graph, signal strength with continuous depth and current from the line.



Line Info Screen - shows the depth to the utility, current on the line and option to log the locate results. GPS coordinates are shown if active.

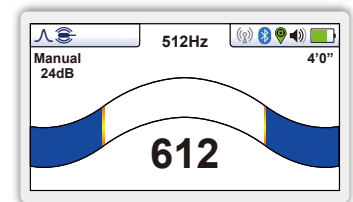

Sonde Locate Screen - shows a peak curtain style bar graph, signal strength and continuous depth for sonde locating.



Alkaline and Li-ion Batteries

- Alkaline = typically 12-hours intermittent use
- Li-ion = typically 27-hours intermittent use



USB Data Port

- Download data logs
- Update the receivers firmware
- Add or remove frequencies and options



Accessory Port

- Charge the Li-ion battery
- A-Frame Fault Locator
- Vehicle charging lead
- Remote Stethoscope Antenna



Antenna Configuration

- Upper Horizontal Guidance Antenna
- Compass Antenna
- Left Displacement Antenna
- Right Displacement Antenna



Ultra Bright LCD

- High visibility 4.3"/10cm LCD
- Auto back-light



Module Compartment

- Optional plug-and-play Bluetooth module



Data Logging

- 50 Million record internal storage
- GPS coordinates (if Bluetooth active)
- Download data with MyLocator app
- Access data via VMMMap Cloud app



Construction


- IP65 and NEMA 4 rating
- Lightweight at 4.6lbs./2kg



Optional plug-in MLA marker locator

	vLoc3-9800 Receiver Specifications
Construction	High impact ABS injection molded housing
Weight & Dimensions	4.4lbs (2kg) / 12.6in(L) x 8.6in(W) x 26.6in(H) (321mm x 219mm x 676mm)
Display	Transmissive 480 x 272 Pixel, 16-bit Color, High-visibility LCD, 4.3" / 10cm
Battery options	Rechargeable custom Lithium-ion batteries with 100-240V AC mains charger Six AA Alkaline batteries
Battery life	Lithium-ion – typically 27-hours intermittent use at 70°F (21°C) Alkaline – typically 12 hours intermittent use at 70°F (21°C)
Operating frequencies	Configurable frequencies from 98Hz to 200 kHz Power - 50Hz and 60Hz Radio - 10kHz - 22.7kHz bandwidth
Operating modes	Classic Locate left/right indication and Sonde Locate
Data logging and transfer	50 Million records - Records include depth, current, frequency, mode, gain setting, signal strength, GPS coordinate, date and time (if Bluetooth active) Download data from the receiver using the free MyLocator3 desktop app, save as xlsx, txt, shp and kml files
Environmental	IP65 and NEMA 4

What's in the box

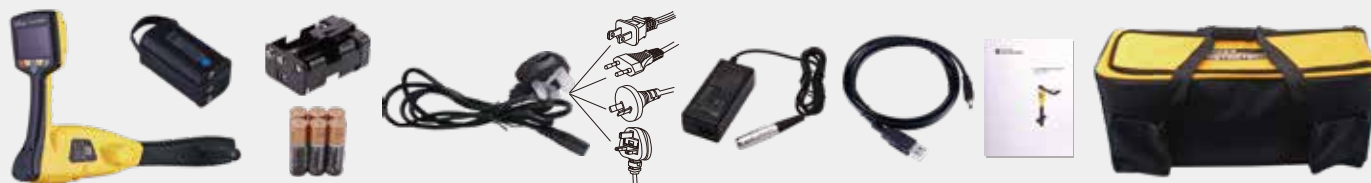

Popular Accessories (See our Accessories Brochure for a full list of receiver and transmitter accessories)



Compatible Transmitters

1- Watt Transmitters



VM-550FF / VM-560FF

5-Watt Transmitter



Loc3-5Tx

10-Watt Transmitter



Loc3-10Tx

INTERMOUNTAIN SALES, INC.

Utility Tools for Today!

**3792 South Lipan Street
Englewood, Colorado 80110**

Telephone: (303) 762-1070 or 1-800-373-3212
FAX: (303) 762-0996 www.intermntnsales.com

Vivax-Metrotech Corporation

3251 Olcott Street, Santa Clara, CA 95054, USA

T/Free: 1-800-446-3392

Tel: +1-408-734-3880

www.vivax-metrotech.com

Tag us on social media @vivax_metrotech



V1.6

Please visit our website for full product specifications.

www.vivax-metrotech.com | www.vxmt.com